

# LORD® 7411 Urethane Adhesive

## Description

LORD® 7411 adhesive is a single-component, moisture-cure urethane adhesive offering excellent adhesion performance, good hydrolytic stability and extended working life. It successfully bonds Hytrel®, thermoplastic polyurethane (TPU), Nylon 11 and other thermoplastics to fiber reinforcements, such as polyester and Kevlar®.

## Features and Benefits

**Identifiable Appearance** – blue color allows for easy identification on light colored extruded tubing, as well as on reinforcement yarns.

**Non-Flammable** – provides a 100% solids formula that contains no solvents; does not require explosion-proof equipment.

**Convenient** – requires no mixing; requires no ovens or other heat source for curing.

**Environmentally Resistant** – resists weathering, humidity and salt spray.

**Chemically Resistant** – solvent resistant when cured. Painting and most cleaning processes do not affect bond strength.

*Hytrel and Kevlar are trademarks of E. I. du Pont de Nemours and Company.*

## Application

**Surface Preparation** – Surfaces should be free of grease, dirt, mold release and other contaminants.

**Applying** – Heat LORD 7411 adhesive to 100-200°F (38-93°C) prior to application. Accurate temperature control is a critical factor in maintaining an acceptable application viscosity. Two methods of heating can be used to reduce the viscosity; oven or hot melt type dispensing equipment. Either method requires the ability to adjust the set point and allow the user an appropriate level of process control.

- **Oven Method**

Preheat LORD 7411 adhesive in the shipping container, then pour adhesive into the reservoir or pump directly from the shipping container onto the part to be bonded.

- **Thermoplastic Hose Production Line**

Equipment is available which will heat and dispense the adhesive onto the extruded core prior to applying the extruded jacket. An example of this method is hot melt dispensing equipment.

**Cleanup** – Use solvents such as acetone or methyl ethyl ketone (MEK) to clean up uncured adhesive. Remove cured adhesive by mechanical methods.

## Typical Properties\*

Appearance	Blue Paste
Viscosity, cP @ 180°F (82°C) Brookfield HAT Spindle 3, 10 rpm	1000-5000
Density	
lb/gal	8.7-9.3
(kg/m <sup>3</sup> )	(1043-1115)
Solids Content by Weight, %	100
Flash Point (Seta), °F (°C)	>200 (>93)

\*Data is typical and not to be used for specification purposes.

# LORD TECHNICAL DATA

## Typical Cured Properties\* and Bond Performance (ASTM D882-A3A, modified)

Tensile Strength at Break, psi (MPa)	5500 (37.9)
Elongation, %	280-380
Tear Strength, pli (N/mm)	750 (132)
T-Peel, pli (N/mm) ASTM 1876-72	
Hytrell 5556	50-55 (8.8-9.6)

\*Data is typical and not to be used for specification purposes.

## Shelf Life/Storage


Shelf life is six months from date of shipment when stored in clean, dry environment at 40-80°F (4-27°C) in original, unopened container.

After opening, protect adhesive from excessive exposure to moisture by using dry nitrogen as an inert cover each time material is removed. Do not return dispensed material to its original container. The viscosity of this product will increase over time.

## Cautionary Information

Before using this or any LORD product, refer to the Safety Data Sheet (SDS) and label for safe use and handling instructions.

*For industrial/commercial use only.* Must be applied by trained personnel only. Not to be used in household applications. Not for consumer use.

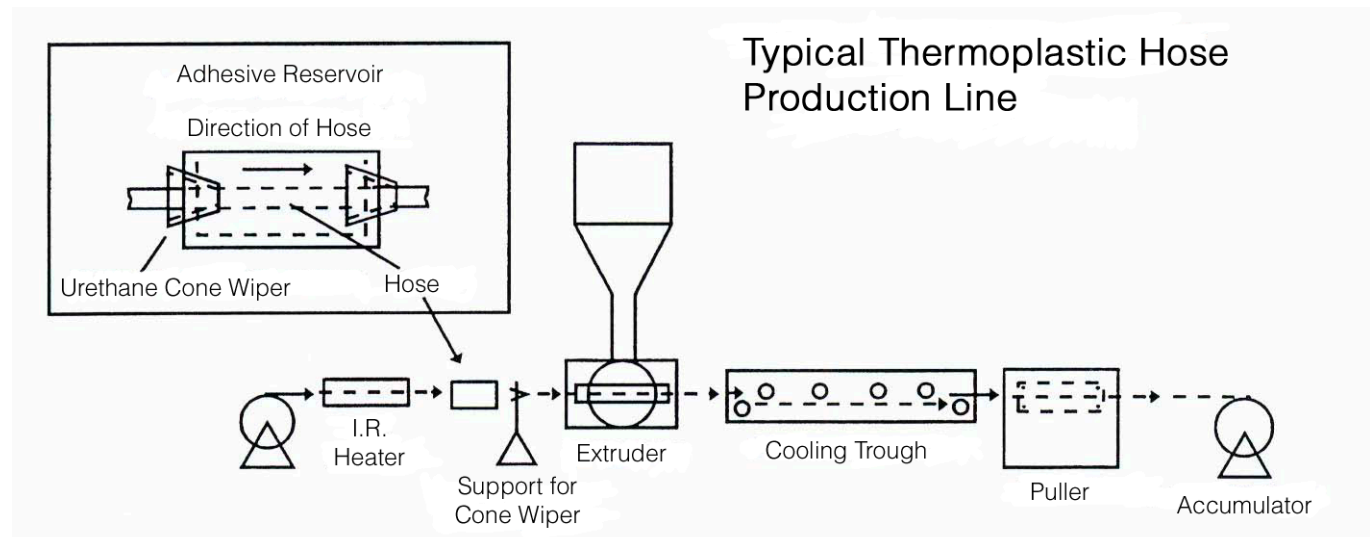

Values stated in this technical data sheet represent typical values as not all tests are run on each lot of material produced. For formalized product specifications for specific product end uses, contact the Customer Support Center.

Information provided herein is based upon tests believed to be reliable. In as much as LORD Corporation has no control over the manner in which others may use this information, it does not guarantee the results to be obtained. In addition, LORD Corporation does not guarantee the performance of the product or the results obtained from the use of the product or this information where the product has been repackaged by any third party, including but not limited to any product end-user. Nor does the company make any express or implied warranty of merchantability or fitness for a particular purpose concerning the effects or results of such use.

LORD and "Ask Us How" are trademarks of LORD Corporation or one of its subsidiaries.

LORD provides valuable expertise in adhesives and coatings, vibration and motion control, and magnetically responsive technologies. Our people work in collaboration with our customers to help them increase the value of their products. Innovative and responsive in an ever-changing marketplace, we are focused on providing solutions for our customers worldwide ... Ask Us How.

### LORD Corporation World Headquarters

111 Lord Drive  
Cary, NC 27511-7923  
USA

### Customer Support Center (in United States & Canada)

+1 877 ASK LORD (275 5673)

[www.lord.com](http://www.lord.com)

For a listing of our worldwide locations, visit [LORD.com](http://LORD.com).

©2015 LORD Corporation OD DS3434 (Rev.3 2/15)

**LORD**  
AskUsHow™